

PRECONTRAINT® 312

WEIGHT: 320 g/sqm	POROSITY: ± 23 %
JUMBO ROLLS*: ± 300 lm	LENGTHS*: ± 50 lm



WINDBREACK NET

PARTITION

ACOUSTIC PARTITION


GUARANTEES AND LABELS



ADVANTAGES

- FERRARI® PRÉCONTRAINT® TECHNOLOGY
 - EXTRA THICK COATING = EXTENDED LIFESPAN
 - EXCELLENT WELDABILITY
 - STRAIGHT THREAD CONSISTENCY
- FLAME RETARDANT
- FINISH VARNISH BOTH SIDES

COLOURS & REFERENCES (COLOURS ARE INDICATIVE)

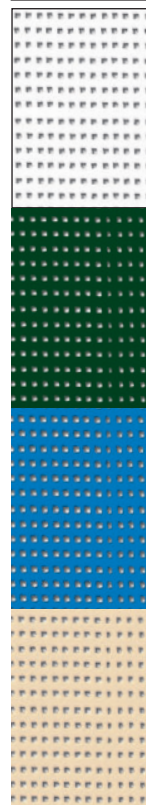

Ref. 312-1323

Ref. 312-1054 RAL 6005

Ref. 312-1053 RAL 5015

Ref. 312-1076 RAL 1015

TECHNICAL SPECIFICATIONS

	PRÉCONTRAINT® 312	STANDARDS
YARN	1100 dtex PES HT	TERSUISSE
WEIGHT	320 g/sqm	EN ISO 2286-2
WIDTH	267 cm	
TENSILE STRENGTH (WARP/WEFT)	230/110 daN/5 cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	30/15 daN	DIN 53.363
ADHERENCE	7/7 daN/5 cm	EN ISO 2411
POROSITY	± 23%	
EFFICIENCY IN WIND	83%	XPG 39-100-3 Measurements carried out at the CMEFE in Geneva, sample 25 x 35 cm.
FLAME RETARDANCY	M2/NFP 92-507 B1/DIN 4102-1	
HANDLING TEMPERATURE RANGE	-30°C/+70°C	
QUALITY MANAGEMENT SYSTEM	ISO 9001	

The technical characteristics shown are average values given as a guide and may be modified.
*Our packaging data are given for information only and may vary as a function of manufacturing conditions.