

# PRECONTRAIT® 362

WEIGHT: 430 g/sqm

POROSITY: ± 28 %

JUMBO ROLLS\*: ± 300 lm

LENGTHS\*: ± 50 lm



PARTITION



WINDBREACK



TEXTILE CLADDING


GUARANTEES AND LABELS



## ADVANTAGES

- ▶ FERRARI® PRÉCONTRAIT® TECHNOLOGY
  - EXTRA THICK COATING = EXTENDED LIFESPAN
  - EXCELLENT WELDABILITY
  - STRAIGHT THREAD CONSISTENCY
- ▶ FLAME RETARDANT
- ▶ FINISH VARNISH BOTH SIDES

## COLOURS & REFERENCES (COLOURS ARE INDICATIVE)

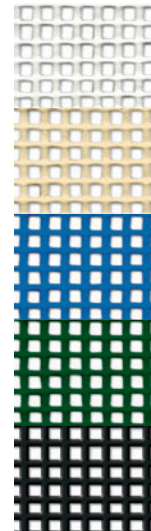

Ref. 362-1323

Ref. 362-1076 RAL 1015

Ref. 362-1053 RAL 5015

Ref. 362-1054 RAL 6005

Ref. 362-1075

## TECHNICAL SPECIFICATIONS

	PRÉCONTRAIT® 362	STANDARDS
YARN	1100 dtex PES HT	TERSUISSE
WEIGHT	430 g/sqm	EN ISO 2286-2
WIDTH	267 cm	
TENSILE STRENGTH (WARP/WEFT)	250/270 daN/5 cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	50/50 daN	DIN 53.363
ADHERENCE	8/8 daN/5 cm	EN ISO 2411
POROSITY	± 28%	
EFFICIENCY IN WIND	80%	XPG 39-100-3 Measurements carried out at the CMEFE in Geneva, sample 25 x 35 cm.
FLAME RETARDANCY	<b>M2/NFP 92-507</b> <b>B1/DIN 4102-1</b>	
HANDLING TEMPERATURE RANGE	-30°C/+70°C	
QUALITY MANAGEMENT SYSTEM		ISO 9001

The technical characteristics shown are average values given as a guide and may be modified.  
\*Our packaging data are given for information only and may vary as a function of manufacturing conditions.