

PRECONTRAIN[®]

745/1115/1215

WIDTH: 267 cm	WEIGHTS: 750/1100/1300 g/sqm
	JUMBO ROLLS*: ± 300/300/220 Im



PILLOW TANKS

GUARANTEES AND LABELS




ADVANTAGES

- **FERRARI[®] PRÉCONTRAIN[®] TECHNOLOGY:**
 - COATING THICKNESS ON FACE OF THE YARN SUPERIOR TO TRADITIONAL PRODUCT
 - EXCEPTIONAL DIMENSIONAL STABILITY
 - HIGH MECHANICAL PROPERTIES
- **DESIGNED SPECIFICALLY FOR PILLOW TANKS⁽¹⁾**
- **SUITABLE FOR LARGE RANGE OF TANK CAPACITIES**

COLOURS & REFERENCES

(COLOURS ARE INDICATIVE)

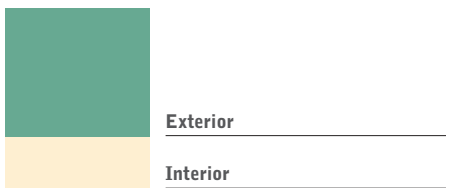

Ref. 745-1136 TYP I

Ref. 1115-1136 TYP II

Ref. 1215-1136 TYP III

TECHNICAL SPECIFICATIONS

	PRÉCONTRAIN[®] 745	PRÉCONTRAIN[®] 1115	PRÉCONTRAIN[®] 1215	STANDARDS TERSUISSE
YARN	1100 dtex PES HT	2 x 1100 dtex PES HT	1670/1100 dtex PES HT	
WEIGHT	750 g/sqm	1100 g/sqm	1300 g/sqm	EN ISO 2286-2
WIDTH	267 cm	267 cm	267 cm	
COATING DOUBLE FACE	PVC	PVC	PVC	
TENSILE STRENGTH (WARP/WEFT)	280/280 daN/5cm	400/400 daN/5cm	550/550 daN/5cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	25/23 daN	55/50 daN	80/70 daN	DIN 53.363
ADHESION	12/12 daN/5 cm	12/12 daN/5 cm	12/12 daN/5 cm	EN ISO 2411
FINISH	VARNISH BOTH SIDES - GREEN FRONT SIDE WITH SATINY GRAIN - BEIGE BACK SIDE			
TANK CAPACITY	<50 M ³	<200 M ³	>200 M ³	
HANDLING TEMPERATURE RANGE	-30°C/+70°C	-30°C/+70°C	-30°C/+70°C	
QUALITY MANAGEMENT SYSTEM				ISO 9001

The technical characteristics shown are average values given as a guide and may be modified.

*Our packaging data are given for information only and may vary as a function of manufacturing conditions.

(1) Given the large quantities of water involved when using pillow tanks it should be understood that the seller of the finished product shall draw the buyer's attention to the need to make the tanks safe.